



Notelight® come in 2 colors temperatures.

Strip 33 cm

Specially adapted for large scores and conductor music stands.

Specifications

- Warm white / white
 3000°K or 4000°K
- 5W
- 24 V DC
- 360g
- Switch
- Electric cable 2 lm
- 1 connector 3 pins

Ref : ECL 024G 3329 (3000°K) Ref : ECL 024G 3340 (4000°K)

Strip 26 cm

Suitable for standard-size scores.

Specifications

- Warm white / white 3000°K or 4000°K
- 4W
- 24 V DC
- 320g
- Switch
- Electric cable 2 lm
- 1 connector 3 pins

Ref : ECL 024G 2629 (3000°K) Ref : ECL 024G 2640 (4000°K)

INDIVIDUAL POWER SUPPLY

Dimmable transformer for 1 light



INDIVIDUAL POWER SUPPLY

Dimmable transformer for 1 light



INDIVIDUAL POWER SUPPLY

Rechargeable battery

This non-dimmable self-contained unit is designed for fast installation on outdoor without electrical source.

Specifications

- Out 24V (câble adaptateur pour éclarage inclus)
- Li-ion 24V
- Autonomy > 8H
- Charge indicator

Ref: ECL BAT24V 44

Options

Battery charger for 5 batteries. Ref: ECL CHA24V X5



Extension lead for 10 or 20 lights

This cable is designed to powered the lights in a daisy chain in order to limit the number of connector and facilitate the installation.

Specifications

(**) In 24V

10x ou 20x / Out 24V

• 120 cm / 47" between each connectors

• Cable H07 RNF 2G1,5

For 10 lights:

Ref: ECL DIS24V 010

For 20 lights:

Ref: ECL DIS24V 020



Lighting extension Extension Y cable.

Ref: ECL Y0224V 001

Extension cable 2 lm / 6,7 ft

Ref : ECL Z0224V 002

 ${\bf Distribution\ extension:}$

Length 6 lm / 19,7 ft

Ref: ECL PRO24V 006

Length 10 lm / 32,8 ft

Ref: ECL PRO24V 010

Power supply unit 19" 2U (RU)



Non dimmable transformer for 20 lights



FLIGHT CASES FOR NOTELIGHT® LIGHTINGS

OpenRoad® Flight cases for 20 Notelight® lightings

Flight cases for 20 Notelight 18 or 24 LED with cables and power supplies.


Specifications

- 9mm / 0.35" birch plywood phenolic coating brown
- Removable OpenRoad® lid
- 2 recessed slidind latches
- 2 recessed handgrips (ref. FOE RSG18L20A) or
 4 recessed handgrips (ref. FOE RSG24L20A)
- 4 castors Ø100 (2 with brakes)

Réf : FOE RSG18L20A for Notelight[®] 26 cm strip Réf : FOE RSG24L20A for Notelight[®] 33 cm strip



Installation examples for daisy chaining power supplies

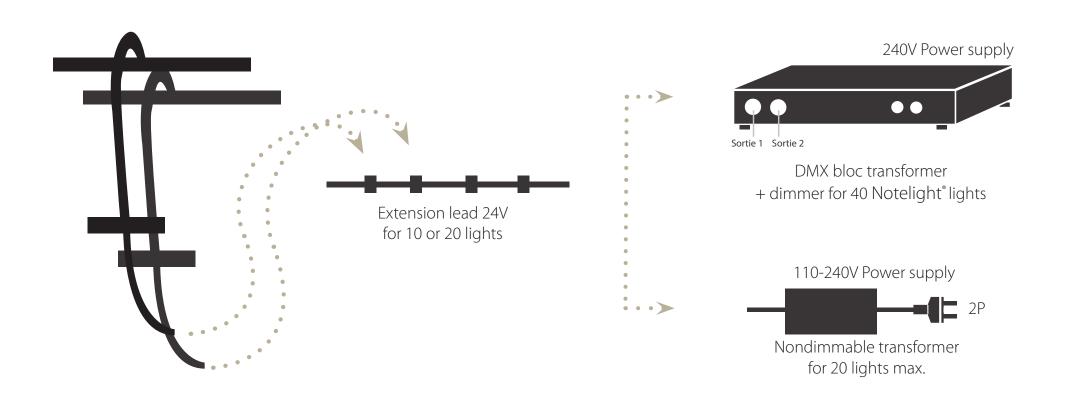




Strip 33 cm

Specifications

- Warm white / white 2400-5500°K
- 10W
- 24 V DC
- 430g
- Electric cable 2 lm
- 1 connector 3 pins

Ref: ECW 33 2455



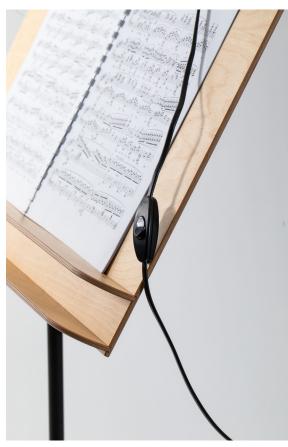

Power supply unit 19" 2U (RU)

This block can powered a max. of 40 Notelight* 33 or 26 cm strip.


Specifications

- In 110-240VAC 4 A, EURO-STYLE plug (other plugs on request)
- 2x Out 0-24VDC
- XLR5 DMX In + Out
- LCD display

Ref: ECW ALI24VDMX



Extension lead for 10 or 20 lights

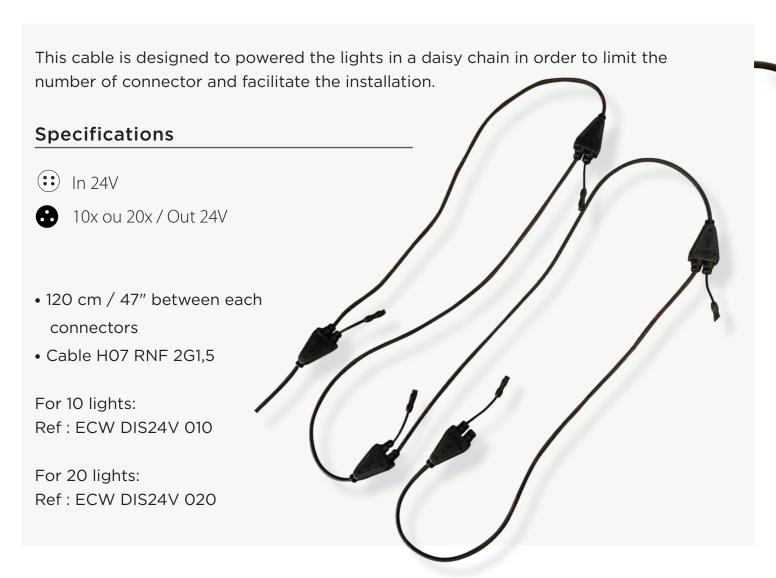



Options

Lighting extension Extension Y cable.

Ref: ECW Y0224V 001

Extension cable 2 lm / 6,7 ft

Ref : ECW Z0224V 002

Distribution extension:

Length 6 lm / 19,7 ft

Ref: ECW PRO24V 006

Length 10 lm / 32,8 ft Ref : ECW PRO24V 010

FLIGHT CASES FOR NOTELIGHT® LIGHTINGS

OpenRoad® Flight cases for 20 Notelight® lightings

Flight cases for 20 Notelight® with cables and power supplies.


Specifications

- 9mm / 0.35" birch plywood phenolic coating brown
- Removable OpenRoad® lid
- 2 recessed slidind latches
- 4 recessed handgrips (ref. FOE RSG24L20A)
- 4 castors D100 (2 with brakes)

Ref: FOE RSG24L20A



Installation examples for daisy chaining power supplies

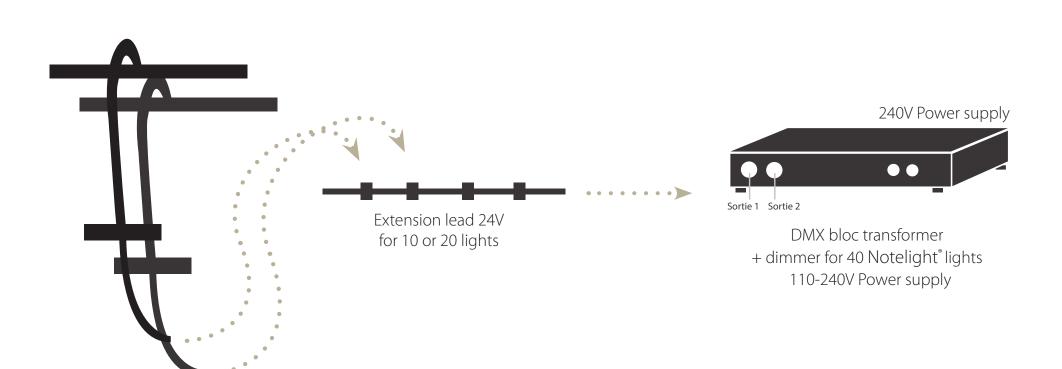

Icons legend











Contacts

Rythmes & Sons

18, rue du Cor de Chasse F-67400 ILLKIRCH +33 (0) 388 650 615 contact@r-sons.com www.r-sons.com

